


SLS

- 18,000 psig maximum working pressure
- 1,100,000 scfh LN₂ (205 gpm)
- 30 to 1 turndown ratio
- 1100 hp



SZGU

- Sub Zero model
- 15,000 psig maximum working pressure
- 120,000 scfh LN₂ (22 gpm)
- 200 hp

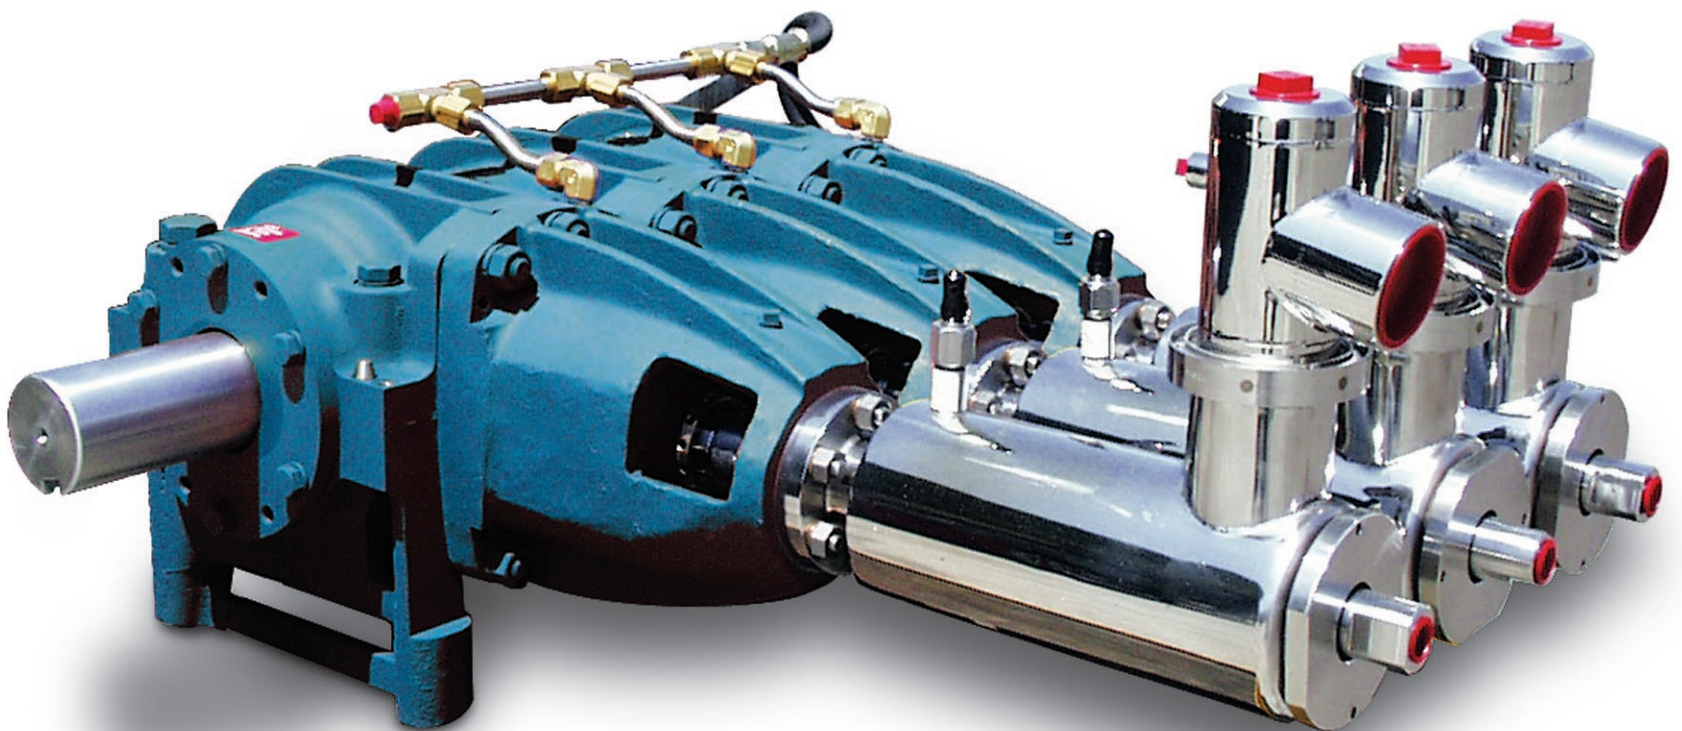


VDFC series

- Direct-diesel fired
- 1,100,000 scfh LN₂ (205 gpm)
- Compact design




Oil-Well service models


3-LMPD Cryogenic Reciprocating Pump

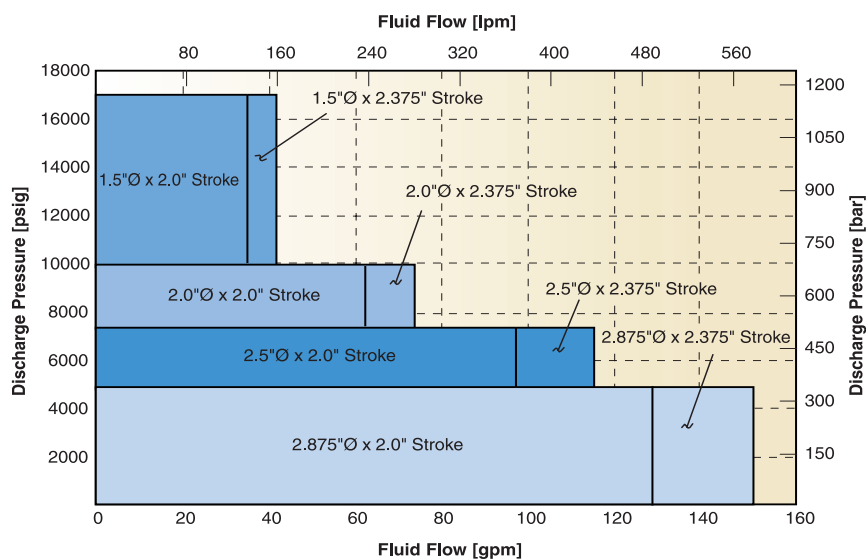

3-GMPD Cryogenic Reciprocating Pump

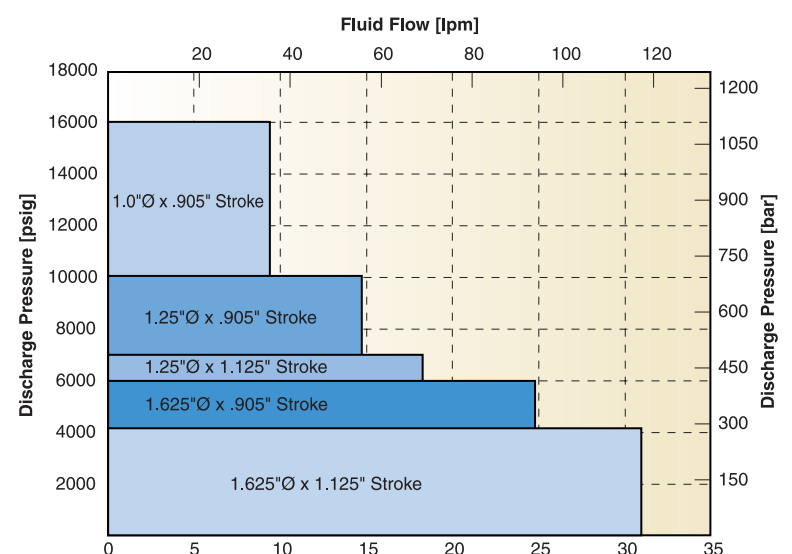


3-GUPD Cryogenic Reciprocating Pump

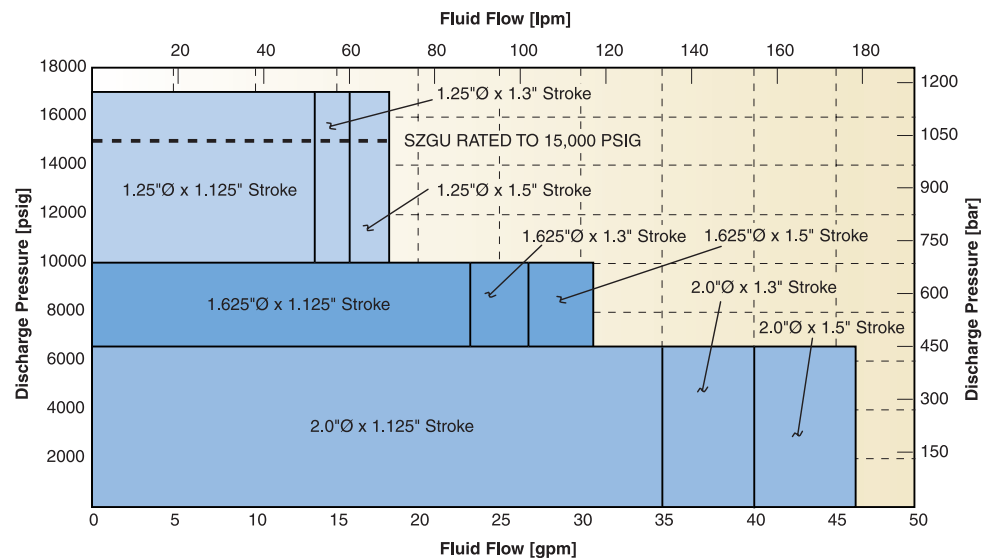


Oil-Well service models

3-SZGU Cryogenic Reciprocating Pump

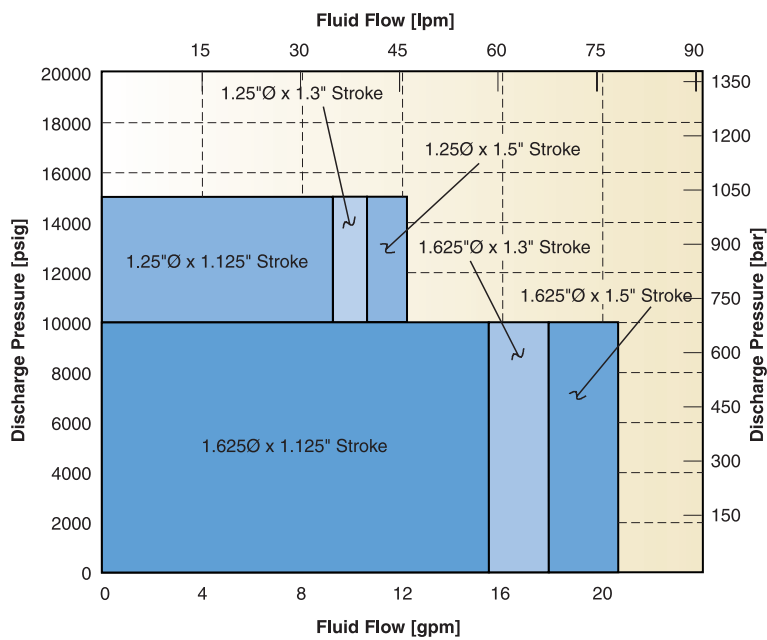

3-SLS 1100 Horsepower Cryogenic Reciprocating Pump

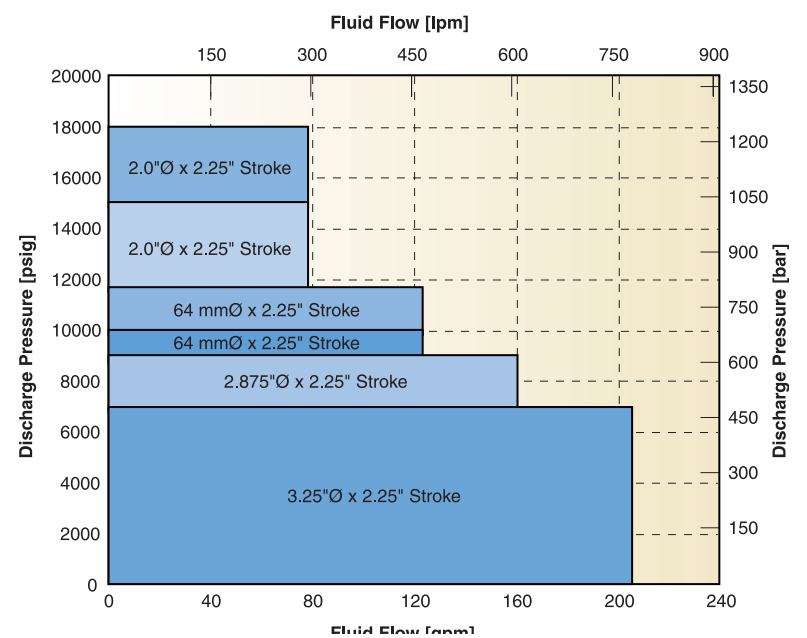

AC-18HD Boost Pump

